Standard detail TreeParker system 1.00 m scale 1:30

Aeration- / Irrigation system

LuWa system, combined aeration and irrigation system
incl. end cap (ø 110 mm)

Irrigation system, ø 80 mm
incl. T-piece ø 80mm

Aeration system, ø 80 mm
inclusief T-piece ø 80

Paving elements for heavy traffic

Paving, per project specification

Aggregate fine 50 mm

Aggregate base course 250 - 300 mm

Tree grate

Remainder

Airlayer between 30 up 80 mm

Root Ball Anchoring for roof gardens GGB 120650

Plantingsoil

Backfill

Steel mesh ø 8 gapsize 150 x 150 mm
at least 40 cm larger than root ball

sub base aggregate 100 mm

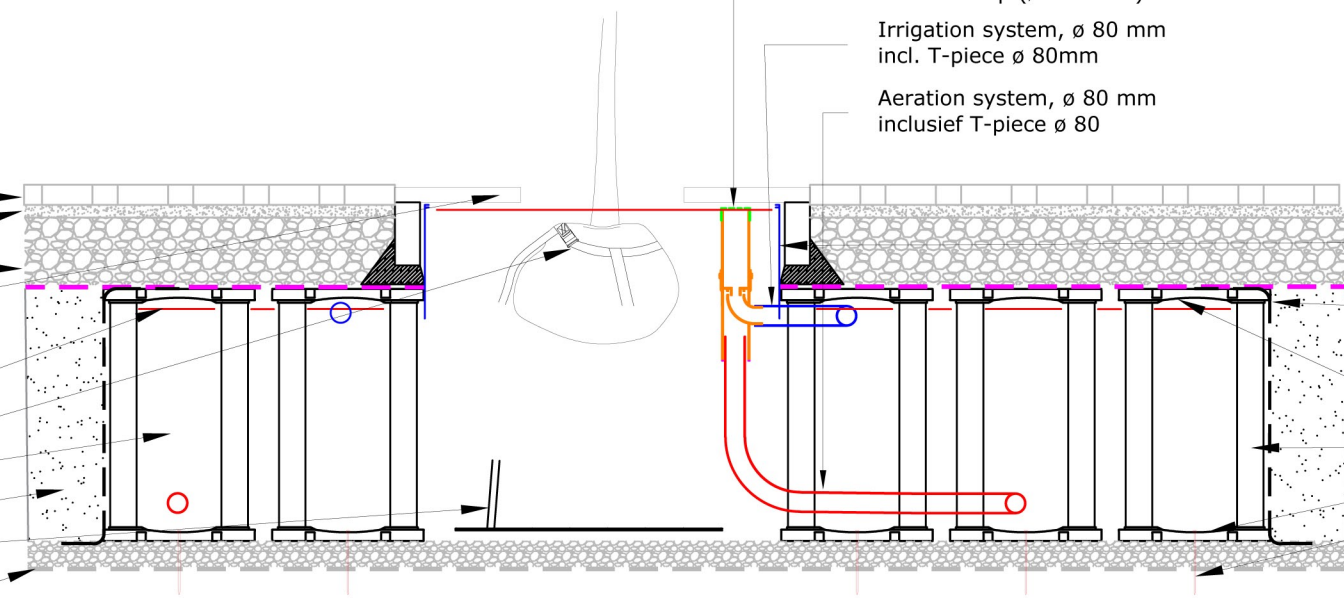

TreeParker system

TRG Root guidance panel 60 cm

Geotextile

TreeParker combigrid 150

TreeParker unit 100 cm

TreeParker Frame + Decks

TreeParker Posts

TreeParker Frames
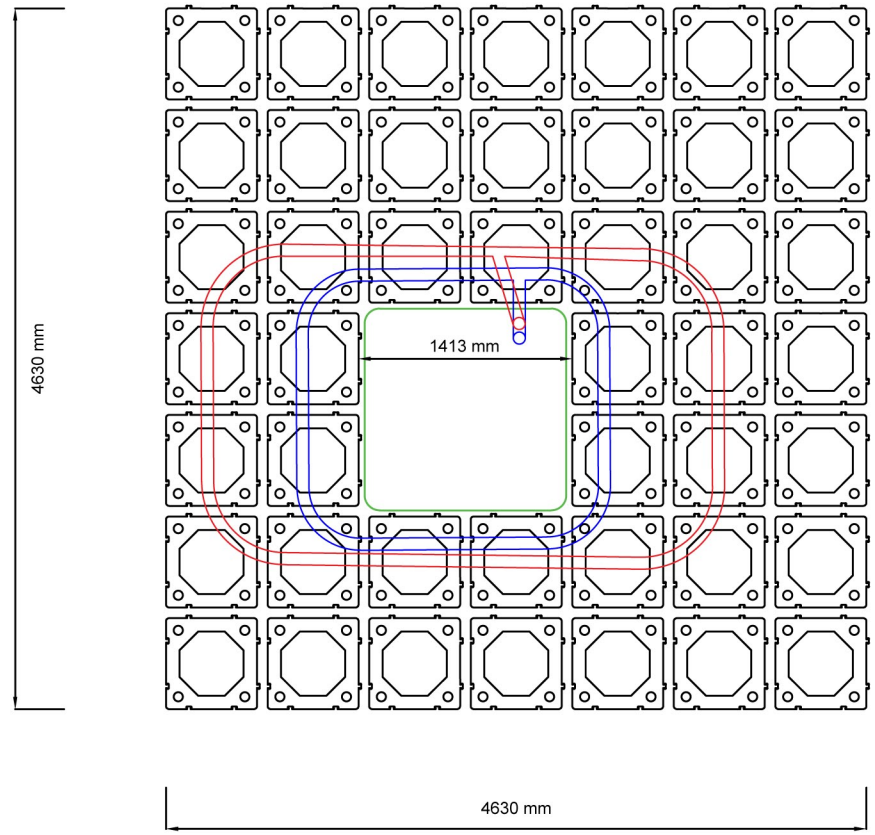
Spikes 2 pcs in each frame